

# ▶ Polycom® RSS™ 4000

## Recording and Streaming Server



Extend and enhance communication across your organisation with video recording and streaming.

The Polycom RSS 4000 Recording and Streaming Server is a network-based appliance that records, archives and streams telepresence and video conferences to desktops, conference rooms and others. Organisations benefit from reduced communication costs, improved knowledge sharing and extended use of information assets.

By leveraging the Polycom RSS 4000 with existing telepresence systems, video conferencing endpoints and video infrastructures, organisations convert one-time events into knowledge assets deliverable to audiences via URL link and the intuitive Polycom RSS 4000 interface. Applications for the Polycom RSS 4000 include executive and corporate communications, training sessions, lectures, project management meetings and others. The Polycom RSS 4000 is simple to use and fully compatible with standards-based telepresence and video conference systems, conference bridges, management applications and others.

Conferences are streamed to live audiences in up to 720p HD resolution and are automatically archived in the Polycom RSS 4000 in 1080p HD resolution, with Polycom StereoSurround™ audio and shared content such as slides and spreadsheets. Integration with Polycom RMX Series Conference Platforms enables one-touch recording and all recordings can be securely played back on telepresence and video conferencing systems or via a Web browser. For organisations requiring a complete video content management solution, the Polycom RSS 4000 integrates with the Polycom Video Media Centre™ (VMC) 1000 to automatically import and publish recordings and widely broadcast live streams.

### **Polycom RSS 4000 makes good business sense**

Real-time communication and collaboration is critical to organisational success. As the market leader in telepresence and video, voice and content collaboration solutions, Polycom makes it easy for people to interact and maximise productivity over any network, in any environment, anywhere around the globe. That's why more organisations worldwide prefer Polycom solutions. In today's economic climate, Polycom solutions make good business sense. See how your organisation can increase productivity and realise a fast ROI with the Polycom RSS 4000 recording and streaming server.

### Recording

- ▶ Easily capture telepresence and video conferences, including content, using standard-based endpoints
- ▶ Record and stream events in high quality with HD and SD formats and high fidelity audio
- ▶ Access and centrally manage via the existing network – no need for additional recording devices
- ▶ Record up to 15 simultaneous conferences for large recording needs

### Streaming and playback

- ▶ Produce up to four standard definition quality live streams
- ▶ Stream in 720p high definition (HD) quality
- ▶ Access video content live or on demand
- ▶ Search and review archived content from video endpoints or Web interface
- ▶ View content in recorded format, including HD

# 

## Application highlights

- Records single point or multipoint conferences with full H.239 content capture
- Polycom high definition (HD) support with 720p and 1080p H.264 video and Polycom Siren™ 22 audio
- High capacity recording for up to 15 simultaneous sessions
- Playback of video content from endpoints or Web browsers
- Integrates with Polycom Video Media Centre™ (VMC) 1000 for enhanced content management and streaming scale
- Integrates with Polycom HDX endpoints and Polycom RMX/MGC conference platforms for intuitive and automated recording and playback
- XML API support for third party integrations
- H.323 standards-based for use with third party conferencing systems

## Audio/Video support


- Live video resolutions: QCIF, C(S)IF, 4CIF, SD, HD, XGA, SVGA, VGA
- Audio support: G.711 a and u, G.722, G.728, G.722.1, Annex C, Siren 14, Siren 22 Stereo

## Recording

- Supports up to 15 concurrent telepresence and video conferencing recording sessions with full video, audio and content
- Records audio/video at varying bit rates – 128 Kbps to 4 Mbps
- Up to 1080p HD record and playback, record stereo calls in single point and point-to-point calls
- Records presented content via H.239
- Multiple layout options and sizes for recording video and content – single stream, side by side
- IVR support to provide users with verbal indicators of status (recording, pause etc.)
- Multiple methods for recording – direct from a video endpoint, MCU/bridge or from the admin user interface

## Playback

- Archived playback to H.323 endpoint, MCU or gateway, with preview window
- Search and sorting options for archives from endpoint interface
- Offload converted video content for playback on other multimedia devices.

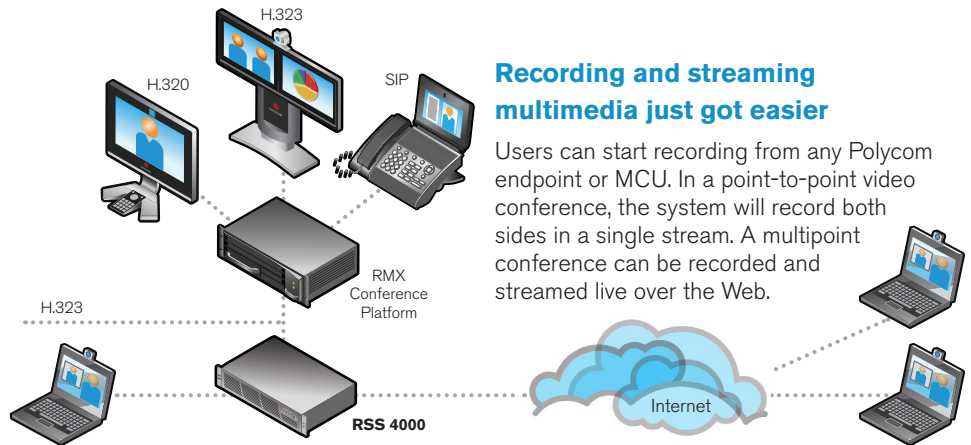

## Recording and streaming multimedia just got easier

Users can start recording from any Polycom endpoint or MCU. In a point-to-point video conference, the system will record both sides in a single stream. A multipoint conference can be recorded and streamed live over the Web.

Windows media download option for video editing or distribution

- Up to 15 H.323 connections for media playback

## Streaming

- High definition – 720p live stream
- Up to four concurrent standard definition live streams
- Unicast up to 200 concurrent streams
- Multicast option
- Supports Windows Media Player and RealPlayer
- Interoperates with the Polycom VMC 1000 for expanded streaming scalability Video on demand content management

## Capacity

- Up to 700 hours of storage at 768 Kbps of H.323 video, audio and content

## Security

- User and endpoint viewing and recording rights authorisation
- Terminal recording and viewing rights authorisation based on the identification
- NAT support for firewalls
- AES media encryption
- TLS/SSL and HTTPS Support

## Management

- Embedded Web server
- Support for third-party gatekeepers
- Online status and control of recording functions of current connected H.323 devices
- Dial out and record for easy recording by administrators
- User Management with Active Directory

integration

- Diagnostic logging
- Network time protocol
- Menu customisation for the end-user interfaces
- Media Tool Kit for offline conversion to MPEG 4 or transcoding of media to lower bit rates
- Automatic backup and file management functions

## Language support

- Multi-language support for end-user navigation and administrators

## Network interface

- 2 x 10/100/1000 Ethernet

## Power

- Input voltage: 100-240 V, 50-60 Hz, 4-10 Amps, supports 1+1 redundancy
- 700W ATX AC power supply w/PFC

## System configuration

- 2 x 1TB SATA hard disk, RAID-1 configuration with 500 GB for media storage

## Physical dimensions

- Form factor: 2U 19-inch rack mount
- Height: 89 mm
- Width: 441 mm
- Depth: 485 mm
- Gross weight: 19.5 kg

**Polycom Worldwide Headquarters**  
4750 Willow Road, Pleasanton, CA 94588  
1.800. POLYCOM or +1 925 924 6000  
[www.polycom.com](http://www.polycom.com)

**Polycom EMEA**  
270 Bath Road, Slough, Berkshire SL1 4DX, UK  
Tel.: 0800 015 2882 | Fax: +44 (0) 1753 723010  
[www.polycom.co.uk](http://www.polycom.co.uk)

